

Holland Stone Series

Concrete Pave Stones



CREATING BEAUTIFUL LANDSCAPES™



®

Holland Stone Series

With the renowned durability of interlocking pave stones, Holland Stone offers the old world charm of a simple paver shape. The rectangular shape can be installed in a number of fascinating patterns to produce simple or intricate designs. Mix these patterns with any of the available standard colors or combination of colors and you've got the potential for an architectural effect limited only by the imagination. Holland Stone is available in Standard, Parkway™ (non-chamfered edges), Provencal™ (smooth) and Heritage™ (tumbled) finishes.

COMPOSITION AND MANUFACTURE


Holland Stone is made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Holland Stone has a compressive strength greater than 8000 psi, a water absorption maximum of 5% and will meet or exceed ASTM C-936 and freeze-thaw testing per Section 8 of ASTM C-67. Heritage™ Series may not comply with ASTM C-67 freeze-thaw durability. Note: Requires modifying the ASTM C 140 - Paver Annex A4 - "The test specimen shall be 60 ± 3 mm thick and, if necessary, cut to a specimen size having a Height/Thickness (width) [H/T] aspect ratio of 0.6 ± 0.1

INSTALLATION

1. Excavate unsuitable, unstable or unconsolidated subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for base material (typically 4 in. to 8 in. (101mm to 202mm) of compacted base for light vehicular and pedestrian traffic) or as otherwise directed by Site Engineer/Architect/Landscape Architect.
2. Place bedding course of washed sand conforming to the grading requirements of ASTM C-33 to a uniform depth of 1-1 1/2 in. (25-38mm) screeded to the grade and profile required.
3. Install Holland Stone with joints approximately 1/8 in. (3mm).
4. Where required, cut pave stones with an approved cutting device to fit accurately, neatly and without damaged edges.
5. Tamp pave stones with a plate compactor, uniformly level, true to grade and free of movement.
6. Spread sand to 1/8 in. (3mm) thickness over entire paving area. Heritage™ Series may require joint sand stabilization.
7. Make one more pass with plate compactor to fill joints with sand.


Complete installation & specification details are available by contacting your Pavestone Company Sales Representative.

Note: Colors are shown as accurately as possible in brochures & samples, but due to the nature of the product, regional color differences and variables in print reproduction, colors may not match exactly. For best results in maintaining color consistency, pavers must be installed from several cubes at a time. Efflorescence, a whitish, powder-like deposit, may appear on concrete pavers. This is a natural occurrence in any concrete product and will usually wear off over time.

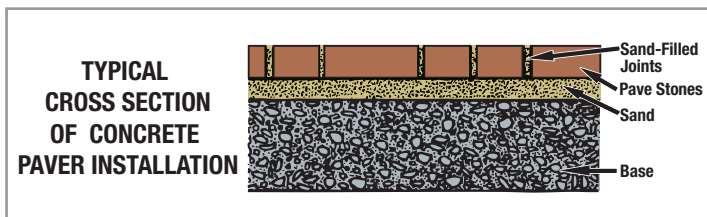


INSTALLATION PATTERNS


Holland Stone (with Chamfer)




45° Herringbone



90° Herringbone




Parquet




Runner Bond


Holland Stone Parkway™ Series (with out Chamfer)




45° Herringbone



90° Herringbone




Parquet




Runner Bond


Holland Stone Heritage™ Series



90° Herringbone




Parquet




Runner Bond


Holland Stone II



Herringbone



Stack



Parquet

APPLICATIONS (contact your local representative for application preferred thickness)

General Road Construction • Parking Lots • Driveways • Patios • Highway Rest Areas • Bridge Underpasses
 Entrance Areas • Industrial Plants • Industrial Yards • Storage Depots • Loading Docks • Flooring in Stables • Sidewalks • Terraces • Garden Pathways
 Pool Decks • Beach Promenades • Pedestrian Malls • Roof Gardens • Street Medians

PRODUCT INFORMATION: Holland Stone is available in one (1) size.

Four (4) Height/Thicknesses: 40mm = 1 5/8^{***}, 60mm = 2 3/8^{**}, 80mm = 3 1/8^{**}, 120mm = 4 3/4^{**}

Finishes Available: **Heritage™ Series** - Tumbled finish reminiscent of old world European charm.

Parkway™ Series - Straight, defined, non-chamfered edges create an elegant, tight fitting installation with the beautiful natural appearance of clay pave stones, but with the strength, durability and functionality of concrete pave stones.

Provincial™ Series - Smooth finish with a fine gradient texture allows for a brighter color presentation and endurance.



Holland Stone

Nominal Dimensions: 3 7/8" W x 7 13/16" L*
 98mm x 198mm



Height/Thickness:	40mm = 1 5/8 ^{***}	60mm = 2 3/8 ^{**}	80mm = 3 1/8 ^{**}	120mm = 4 3/4 ^{**}
Wt./Stone	4.00 lbs.	6.0 lbs.	8.1 lbs.	12.2 lbs
Stones/Sq. ft.	4.66	4.66	4.66	4.66
Stones/Pallet	720	480	384	288
Approx. Wt./Pallet	2,899 lbs.**	2,884 lbs.**	2,988 lbs.**	3,513 lbs.**
Sq.ft./Pallet	155	103	83	62
Product Number	215	217	219	222

* For light duty, foot traffic only

Holland Stone II™

Nominal Dimensions: 3 7/8" W x 7 13/16" L*
 98mm x 198mm




Height/Thickness:	60mm = 2 3/8 ^{**}	80mm = 3 1/8 ^{**}
Wt./Stone	6 lbs.	8.1 lbs.
Stones/Pallet	480	384
Approx. Wt./Pallet	2,884 lbs.**	2,988 lbs.**
Sq. ft./Pallet	103	83
Product Number	227	229



Holland Stone Heritage™ Series

Nominal Dimensions: 3 7/8" W x 7 13/16" L*
 98mm x 198mm

Height/Thickness:	60mm = 2 3/8 ^{**}	80mm = 3 1/8 ^{**}
Wt./Stone	6 lbs.	8.1 lbs.
Stones/Sq.Ft.	4.66	4.66
Stones/Pallet	480	384
Approx. Wt./Pallet	2,884 lbs.**	2,988 lbs.**
Sq. ft./Pallet	103	83
Product Number	217T	219T



Double Holland Stone (also see City Stone™ V)

Nominal Dimensions: 7 13/16" W x 7 13/16" L*
 198mm x 198mm

Height/Thickness:	60mm = 2 3/8 ^{**}	80mm = 3 1/8 ^{**}
Wt./Stone	12 lbs.	15.6 lbs.
Stones/Sq.ft	2.33	2.33
Stones/Pallet	240	192
Approx. Wt./Pallet	2,884 lbs.**	2,988 lbs.**
Sq. ft./Pallet	103	83
Product Number	257	259



Holland Stone Parkway™ Series

Nominal Dimensions 3 7/8" W x 7 13/16" L*
 98mm x 198mm

Height/Thickness:	60mm = 2 3/8 ^{**}	80mm = 3 1/8 ^{**}
Wt./Stone	6 lbs.	8.1 lbs.
Stones/Sq.Ft.	4.66	4.66
Stones/Pallet	480	384
Approx. Wt./Pallet	2,884 lbs.**	2,988 lbs.**
Sq. ft./Pallet	103	83
Product Number	237	239



Holland Stone IV (also see City Stone™ IV)

Nominal Dimensions: 3 7/8" W x 3 7/8" L*
 98mm x 98mm

Height/Thickness:	60mm = 2 3/8 ^{**}
Wt./Stone	3 lbs.
Stones/Pallet	960
Approx. Wt./Pallet	2,884 lbs.**
Sq. ft./Pallet	103
Product Number	213

*Fractional dimensions are nominal.
 Not available in all markets


** Does NOT include 50 lbs. for wooden Pallet.

Holland Stone Heritage™ Series is sold on pallets or in bags. There is approximately the same sq. ft./pallet in each bagged product after tumbling. Packaging may vary from plant to plant. Contact your Pavestone Company manufacturer for packaging details.



Holland Stone Heritage™ Series

Concrete Pave Stones



PAVESTONE®

Creating Beautiful Landscapes™

www.pavestone.com

- | | | | |
|---------------------------|----------------|-----------------------|----------------|
| • Atlanta, GA: | (770) 306-9691 | • Houston, TX: | (281) 391-7283 |
| • Austin/San Antonio, TX: | (512) 558-7283 | • Kansas City, MO: | (816) 524-9900 |
| • Boston, MA: | (508) 947-6001 | • Las Vegas, NV: | (702) 221-2700 |
| • Cartersville, GA: | (770) 607-3345 | • New Orleans, LA: | (985) 882-9111 |
| • Charlotte, NC: | (704) 588-4747 | • Phoenix, AZ: | (602) 257-4588 |
| • Cincinnati, OH: | (513) 474-3783 | • St. Louis/ | |
| • Colorado Springs, CO: | (719) 322-0101 | • Cape Girardeau, MO: | (573) 332-8312 |
| • Dallas/Ft. Worth, TX: | (817) 481-5802 | • Sacramento/ | |
| • Denver, CO: | (303) 287-3700 | • Winters, CA: | (530) 795-4400 |
| • Hagerstown, MD: | (240) 420-3780 | | |

PLEASE CHECK WITH A PAVESTONE REPRESENTATIVE FOR AVAILABILITY

© 2011 by Pavestone Company. All Rights Reserved. **PAVESTONE**, Creating Beautiful Landscapes™, Provençal™ Series, Parkway™ Series and Heritage™ Series are trademarks of the Pavestone Company.



UNI-GROUP U.S.A.
Manufacturers of UNI Paving Stones

SKU#CM 051v9 07/11