

GRASSTONE PAVERS ON COMPACTED BASE WITH CONCRETE TOE EDGE RESTRAINT

PAVESTONE GRASSTONE PAVER
4" (100MM) MINIMUM THICKNESS

BEDDING SAND
MAXIMUM 1/2" (12MM)

OPEN CELL FILLED WITH TOPSOIL AND PLANTED
WITH GRASS OR OTHER SUITABLE GROUNDCOVER

MINIMUM 1" (25mm) OF TOPSOIL OVER GRASSTONE
PAVERS/ PLANT WITH GRASS OR OTHER SUITABLE
GROUNDCOVER

INSITU CONCRETE TOE

REBAR CONTINUOUS

ADJACENT LANDSCAPE

1"
(25 mm)
MIN.


4"
(100 mm)
MIN.

1" (25 mm)
MIN.

4"
(100 mm)
MIN.

COMPACTED AGGREGATE BASE
4" (100MM) MINIMUM THICKNESS

COMPACTED SOIL SUBGRADE

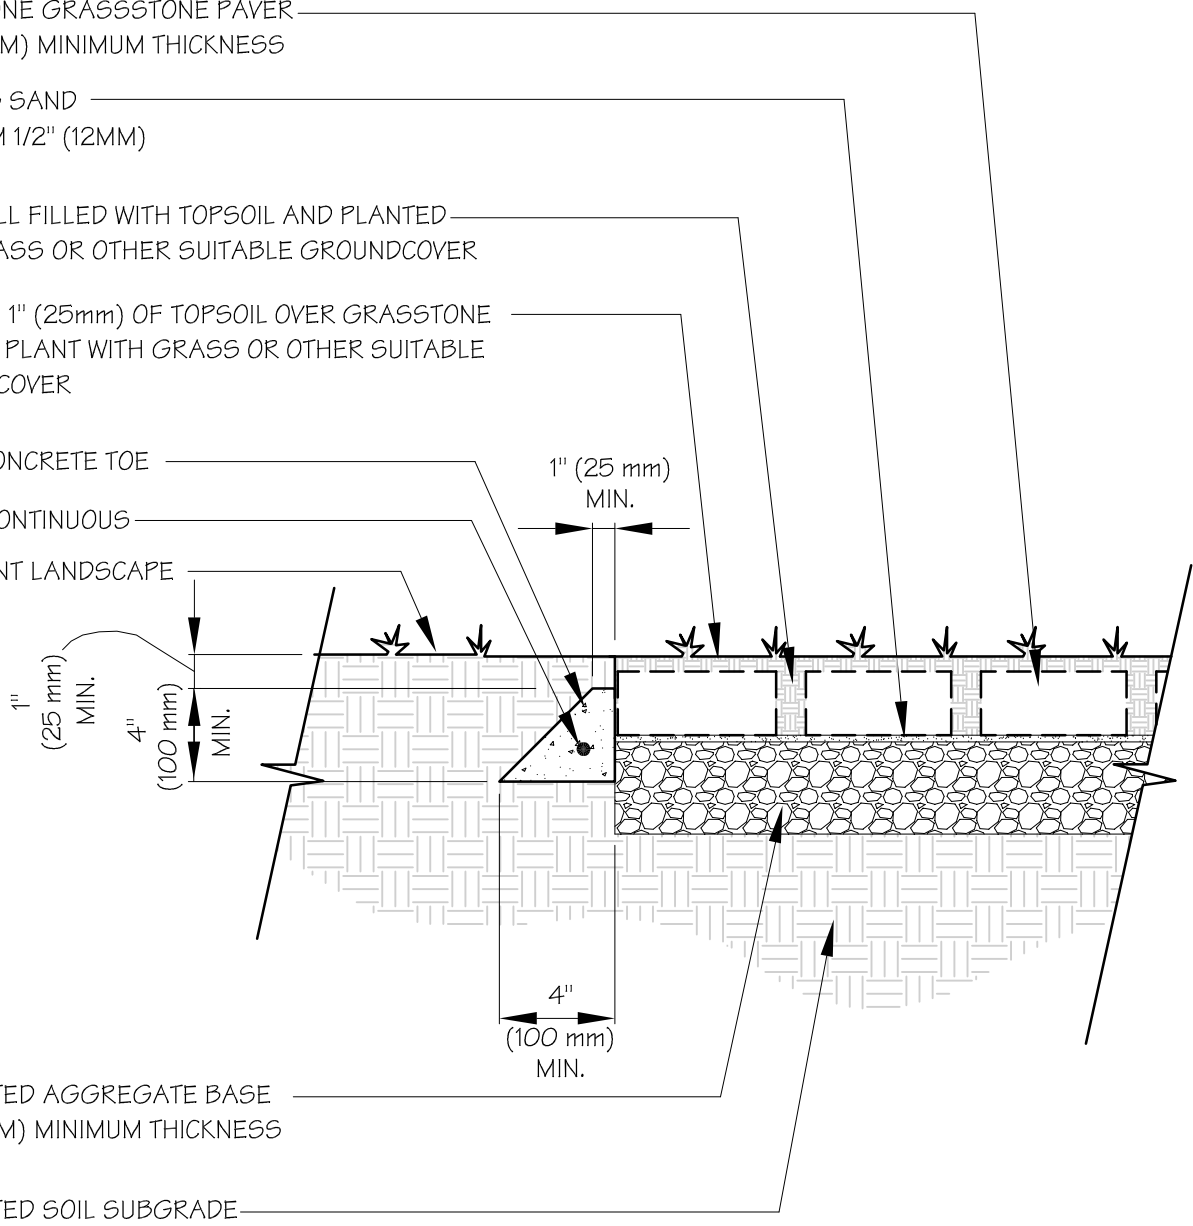

file: grass-stn-toe-edge.dwg

SCALE: 1 1/2" = 1'-0"

NOTE: DETAIL DESIGN SHALL BE APPROVED BY A LICENSED ARCHITECT, ENGINEER
OR LANDSCAPE ARCHITECT WITH JURISDICTION IN THE STATE OF CALIFORNIA AND ALL APPLICABLE DESIGN CODES.